



JLE15BMD2-2

1-Line Bi-directional Ultra-low Capacitance TVS Diode

Jalan-Microelectronics


Description

The JLE15BMD2-2 help protect sensitive electronic equipment against electrostatic discharge (ESD). They supplement the on-chip protection of integrated circuitry and are best suited for low-voltage, high-speed applications where low capacitance is important. Data ports utilizing such high-speed protocols as USB 2.0, IEEE1394, HDMI and DVI can benefit from this new technology.

Features

- * Ultra-Low capacitance:0.05pF(typ.)
- * Low leakage current: (<10nA)
- * Fast response time (<1ns)
- * Bi-directional,single line protection
- * 2-pin leadless package
- * Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: ±15kV
 - Contact discharge: ±8kV
- * RoHS Compliant
- * Package:DFN1006-2

Circuit Diagram

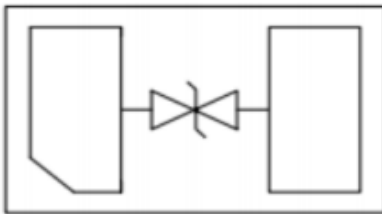


Circuit and Pin Schematic

Applications

- * USB 3.0/3.1
- * HDMI 1.3/1.4/2.0
- * RF Antenna
- * External Storage
- * Digital Camera

Package Outline

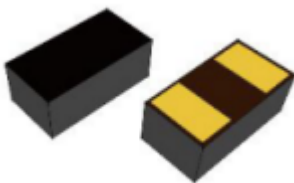

Ordering Information

Part Number	Packaging	Reel Size
JLE15BMD2-2	10000/Tape & Reel	7 inch



JLE15BMD2-2

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Value	Unit
ESD per IEC 61000-4-2 (Air)	VESD	± 15	kV
ESD per IEC 61000-4-2 (Contact)		± 8	
Operating Temperature Range	TJ	-40to 120	$^\circ\text{C}$
Storage Temperature Range	Tstg	-40to +85	$^\circ\text{C}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Continuous Operating Voltage	V_{DC}				15	V
Trigger Voltage	V_T	IEC61000-4-2 8KV Contact		450		V
Clamping Voltage	V_C	IEC61000-4-2 8KV Contact		40		V
Leakage Current	I_L	DC 15V shall be applied on component			10	nA
Junction Capacitance	C_J	Measured at 10MHz		0.05		pF

Soldering Parameters

Reflow Condition	Pb – Free assembly	
Pre Heat	- Temperature Min ($T_{s(\min)}$)	150 $^\circ\text{C}$
	- Temperature Max ($T_{s(\max)}$)	200 $^\circ\text{C}$
	- Time (min to max) (t_s)	60 – 180 seconds
Average ramp up rate (Liquidus Temp (T_L) to peak)		3 $^\circ\text{C}/\text{second}$ max
$T_{s(\max)}$ to T_L - Ramp-up Rate		3 $^\circ\text{C}/\text{second}$ max
Reflow	- Temperature (T_L) (Liquidus)	217 $^\circ\text{C}$
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 $^\circ\text{C}$
Time within 5 $^\circ\text{C}$ of actual peak Temperature (t_p)		10 – 30 seconds
Ramp-down Rate		6 $^\circ\text{C}/\text{second}$ max
Time 25 $^\circ\text{C}$ to peak Temperature (T_p)		8 minutes max

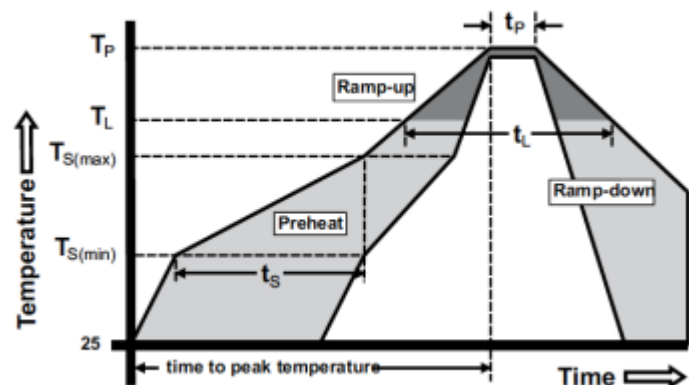



JLE15BMD2-2

Typical Performance Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

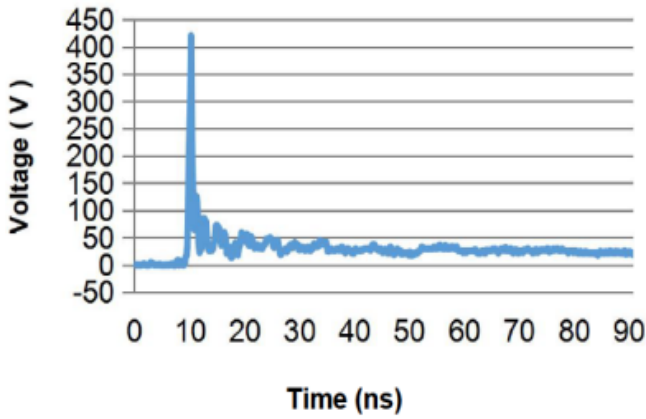


Figure 1. Typical ESD Response

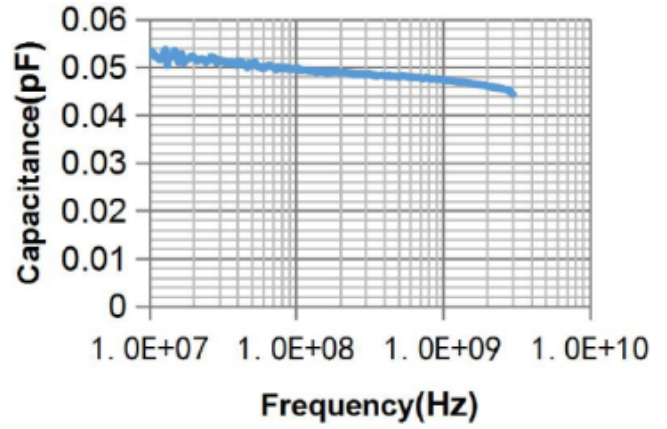


Figure 2. Typical Capacitance vs. Frequency

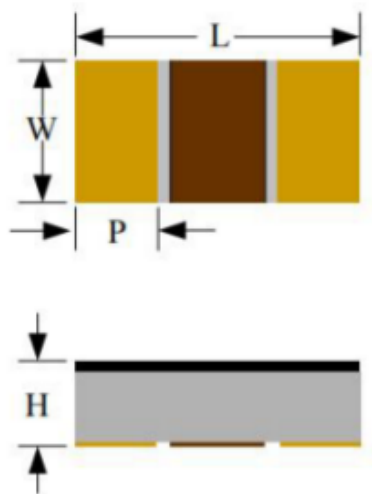


Figure 3. HDMI 2.0 Mask at 6.0 Gbps




JLE15BMD2-2

DFN1006-2 Package Outline Drawing (Dimensions in millimeters)



<i>Dim</i>	<i>Millimeters</i>	
	<i>Min</i>	<i>Max</i>
<i>L</i>	0.90	1.10
<i>W</i>	0.42	0.62
<i>P</i>	0.15	0.35
<i>H</i>	0.25	0.45

Suggested Land Pattern

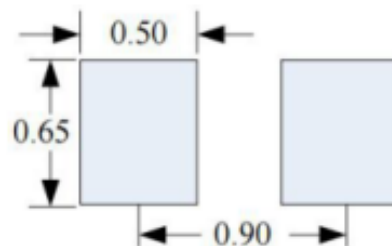

*Sizes in mm

NOTICE

Jelan-Link reserves the right to make changes without further notice to any products here in.

Only obligations are those in the Jelan-Link Standard Terms and Conditions of Sale and in no case will Jelan-Link be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.